


TONSBERG MOORING LINK


Tønsberg Mooring Link - galvanised steel mooring link of compact design typically utilised as connection between wire

rope and fibre tail. Available in three sizes 90 T, 120 T and 180 T. 300 T can be supplied on special request.

Link 90 T Tail 56-68 mm	Link 120 T Tail 72-80 mm	Link 180 T Tail 88-112 mm
A = 285 mm	A = 324 mm	A = 350 mm
B = 115 mm	B = 142 mm	B = 184 mm
C = 136 mm	C = 150 mm	C = 160 mm
D = 65 mm	D = 75 mm	D = 85 mm
E = 75 mm	E = 90 mm	E = 120 mm
R = 22 mm	R = 28 mm	R = 30 mm
<i>Breaking load:</i> 90 tonnes	<i>Breaking load:</i> 120 tonnes	<i>Breaking load:</i> 180 tonnes
<i>Proof load:</i> 30 tonnes	<i>Proof load:</i> 40 tonnes	<i>Proof load:</i> 60 tonnes
<i>Weight:</i> 11,2 kg	<i>Weight:</i> 16,9 kg	<i>Weight:</i> 25 kg

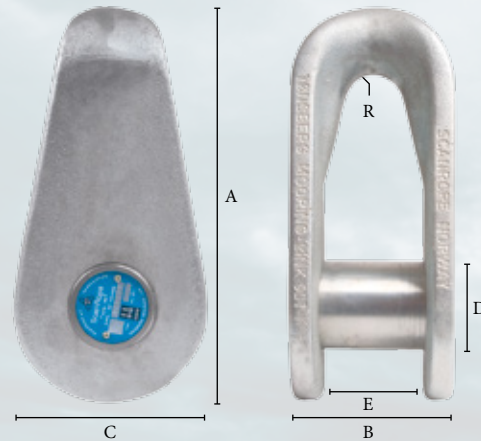

Each link is proof tested and certified by DNV. DNV Type Approval.

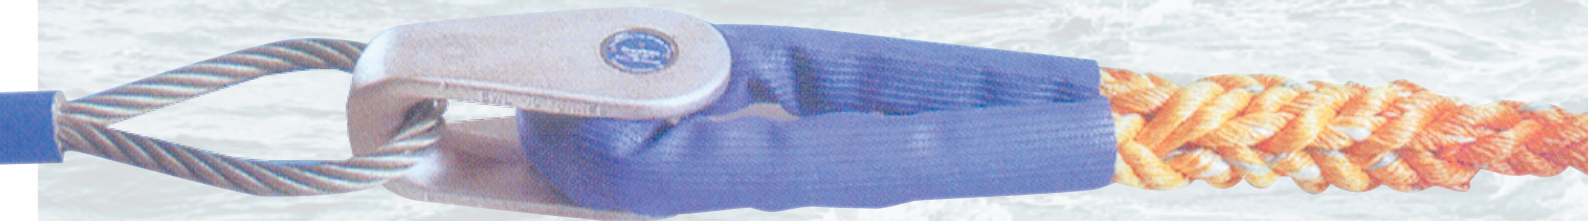

Fibre rope around the bolt, wire rope around the body.

Tønsberg Mooring Link with roller		
	120 T	180 T
Opening E	90 mm	120 mm
Roller dia.D	82 mm	97 mm
Weight	2,1 kg	4,5 kg



Tønsberg Mooring Link 300T
A = 447 mm
B = 216 mm
C = 190 mm
D = 110 mm
E = 146 mm
R = 36 mm
Breaking load: 300 tonnes
Safe working load: 100 tonnes
Weight: 52 kg
With Works certificate

